

# EVVO

World Class Solar String Inverters



High Performance



High Efficiency



Warranty



World Class On Grid Solar Inverters



Service Help Line  
1800-572-4090





World Class Solar String Inverters



High Performance



High Efficiency

## High-yield

- Max 98.6% efficiency
- Real time precise MPPT algorithm for max harvest
- Wide input voltage operation range from 250V to 960V

## All in one, flexible and economical system solution


- DC switch
- DC surge protection device
- AC surge protection device ( option )
- Built-in PV Combiner
- Power management unit
- Optimum selection for big PV plants, commercial buildings...

## Low maintenance cost


- Detachable cover for easy installation
- Rust-free aluminum covers
- Flexible monitoring solution
- Multi function relay can be configured to show various inverter information

## Intelligent grid management

- ZVRT support
- Reactive power adjustable
- Self power reducer when over frequency
- Remote active/reactive power limit control

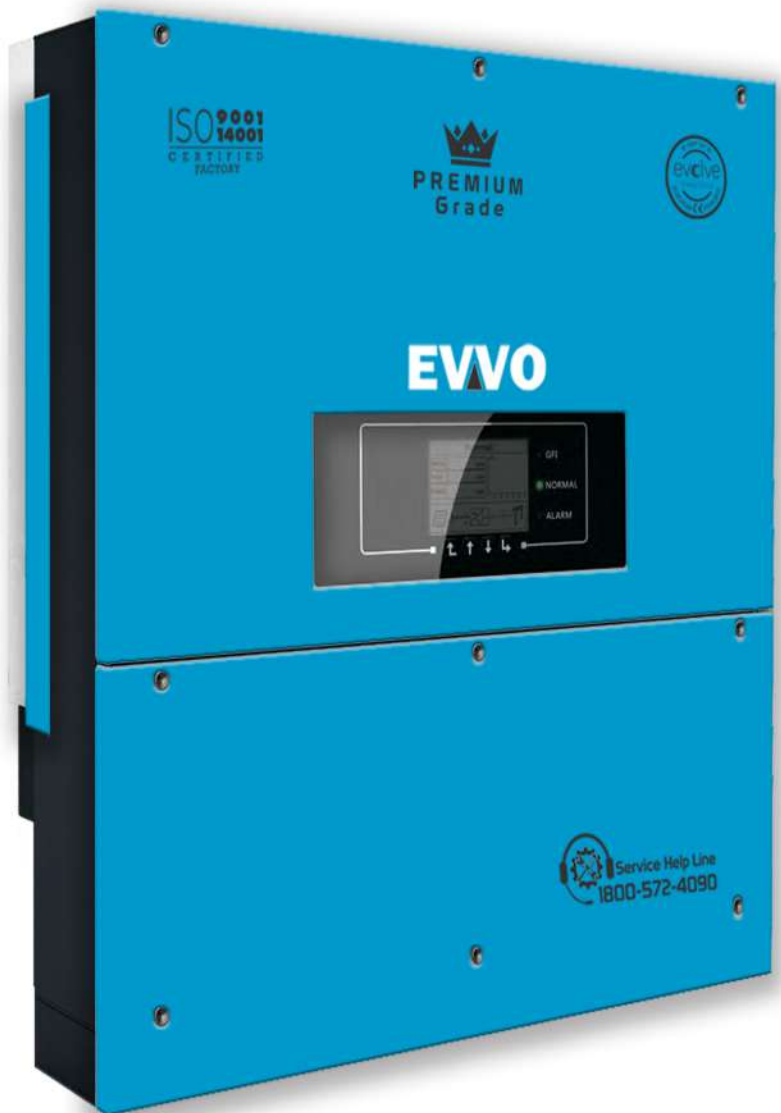

## Efficiency Curve

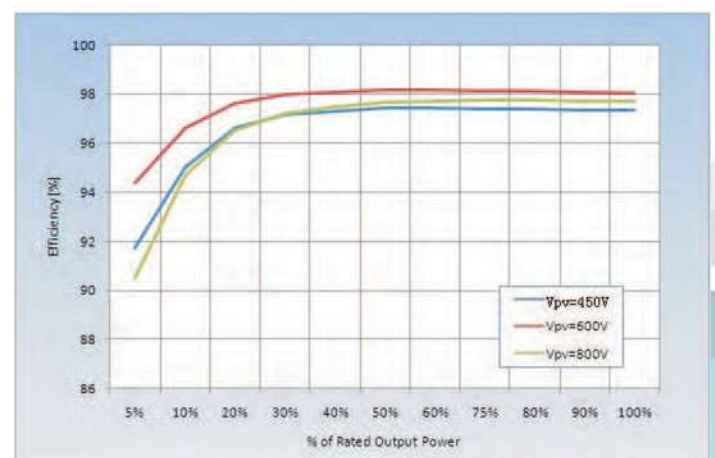

EVVO 50000 60000 70000

# EVVO 50000 / 60000 / 70000

## Three Phase Inverter Tri MPPT

Data Sheets	50000W	60000W	70000W
<b>Input(DC)</b>			
Max. Input power	55000W	66000W	77000W
Max DC power for single MPPT	22000W(500V-800V)	22000W(530V-800V)	26000W(660V-800V)
Number of independent MPPT	3		
Number of DC inputs	4/3/3	4/4/4	
Max. input voltage	1000V		
Start-up input voltage	350V		
Rated input voltage	600V	600V	700V
MPPT voltage range	250V-960V		
Full load DC voltage range	500V-800V	530V-800V	660V-800V
Max. input MPPT current	40A/30A/30A	40A/40A/40A	40A/40A/40A
Max. input current per string	12A		
<b>Output(AC)</b>			
Rated power(@230V,50Hz)	50000W	60000W	70000W
Max. AC power	50000VA	60000VA	70000VA
Max. output current	80A	90A	90A
Nominal Grid Voltage	3/N/PE,3/PE,230/400Vac	3/N/PE,3/PE,230/400Vac	3/N/PE, 277/480Vac OR 3/PE, 277/480Vac
Grid Voltage Range	180Vac-270Vac	180Vac-270Vac	245Vac-305Vac
Nominal Frequency	50/60Hz		
Grid frequency range	47~53 / 57~63Hz (According to local standard)		
Active power adjustable range	0~100%		
THDi	<3%		
Power factor	1(Adjustable +/-0.8)		
<b>Performance</b>			
Max efficiency	98.5%	98.6%	98.6%
European weighted efficiency	98.3%	98.4%	98.4%
Self-consumption at night	<1W		
Feed-in start power	45W		
MPPT efficiency	>99.9%		
<b>Protection</b>			
DC reverse polarity protection	Yes		
DC switch	Yes		
Protection class /overvoltage category	I/III		
Input/output SPD(II)	Optional		
Safety protection	Anti islanding, RCMU, Ground fault monitoring		
Certification	IEC 62116,IEC 61727,IEC 61683,IEC 60068(1,2,14,30),IEC 62109-1/2 CE,CGC,ZVRT,AS4777,AS3100,VDE4105,C10-C11,G59(more available on request)		
SPD	MOV : Type III standard / Type II optional		
ARPC	Anti Reverse Power Controller(optional)		
<b>Communication</b>			
Power management unit	According to certification and request		
Standard Communication Mode	RS485, Wifi (optional), SD card, Multi-function relay		
Operation Data Storage	25 years		
<b>General data</b>			
Ambient temperature range	-25°C...+60°C		
Topology	Transformerless		
Degree of protection	IP65		
Allowable relative humidity range	0...100% no condensing		
Max.operating altitude	4000m		
Noise	<60dB		
Weight	68kg	70kg	
Cooling	Fan		
Dimension	737*713*297mm		
Display	LCD display		
Warranty	7 years		



World Class Solar String Inverters

[www.evvosolar.com](http://www.evvosolar.com) | [info@evvosolar.com](mailto:info@evvosolar.com)





**World Class Solar String Inverters**

**Evolve Energy Group Company Ltd.,**

**Commercial Centre, Sheung Wan, Hong Kong, Asia.**

**info@evvosolar.com | www.evvosolar.com**

## **MANUFACTURING HUB**

**Solar Inverters**



**Shenzhen - China**



**Solar Panels**



**Hong Kong - Vietnam**

**Surat - Gujarat**

**evolve**  
-Energy Group-



## **GLOBAL SALES CENTRES**

**#371, SIDCO Industrial Estate,**

**North Phase Ambattur, Chennai- 98, India.**

**sales@evolveindia.in | www.evolveindia.in**

**Srilanka Office :**

**Colombo- 11, Srilanka**

**intl@evolveindia.in | www.evovelanka.com**

**Authorized Distributors / Dealers**